
INSTALLATION INSTRUCTIONS



ConnexSys[™] Side Cover System

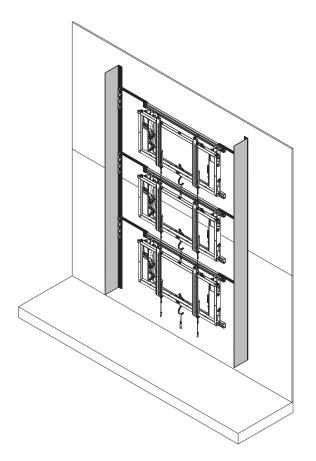

DISCLAIMER

Milestone AV Technologies and its affiliated corporations and subsidiaries (collectively "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.

DEFINITIONS


MOUNTING SYSTEM: A MOUNTING SYSTEM is the primary Chief product to which an accessory and/or component is attached.

ACCESSORY: AN ACCESSORY is the secondary Chief product which is attached to a primary Chief product, and may have a component attached or setting on it.

COMPONENT: A COMPONENT is an audiovisual item designed to be attached or resting on an accessory or mounting system such as a video camera, CPU, screen, display, projector, etc.

WARNING: A WARNING alerts you to the possibility of serious injury or death if you do not follow the instructions.

CAUTION: A CAUTION alerts you to the possibility of damage or destruction of equipment if you do not follow the corresponding instructions.



follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty! It is the installer's responsibility to make sure all accessories are properly assembled and installed using the instructions provided.

WARNING: Failure to provide adequate structural strength for this accessory can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the structure to which this accessory is attached can support five times the combined weight of all equipment. Reinforce the structure as required before installing the accessory. The wall to which the accessory is being attached may have a maximum drywall thickness of 5/8" (1.6cm). Do not install drywall anchors into the seam between drywall pieces.

WARNING: Use this accessory only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer.

WARNING: Never operate this accessory if it is damaged. Return the accessory to a service center for examination and repair.




WARNING: Do not use this accessory outdoors.

WARNING: RISK OF INJURY TO PERSONS! Do not use this accessory to support video equipment such as televisions or computer monitors.

--SAVE THESE INSTRUCTIONS--


DIMENSIONS

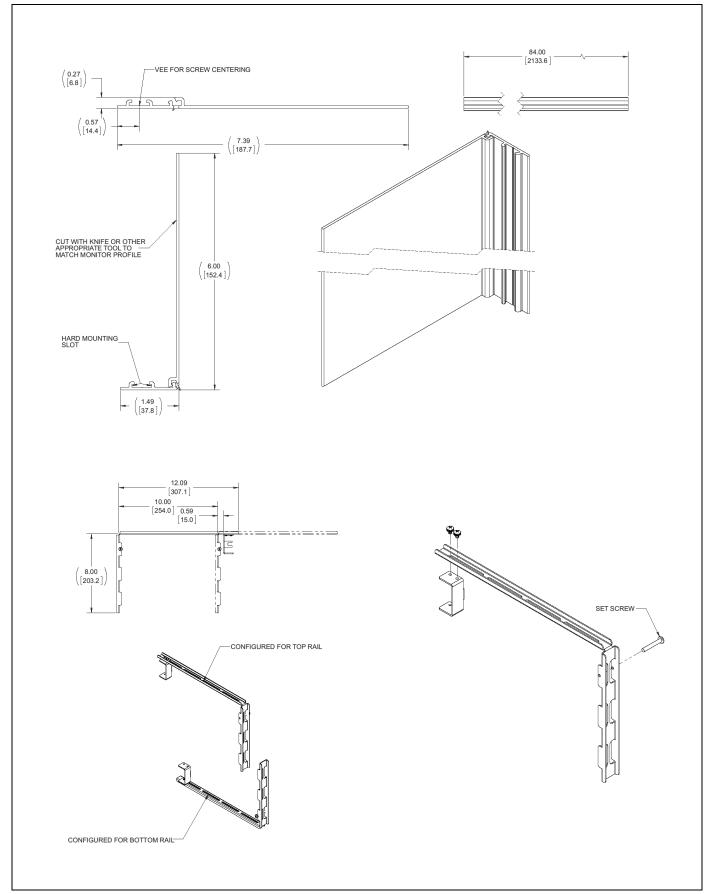

ADJUST EXTENSION POSITION AS REQUIRED, SEE SHEET 2

EXISTING STOP


DIMENSIONS (CONTINUED)

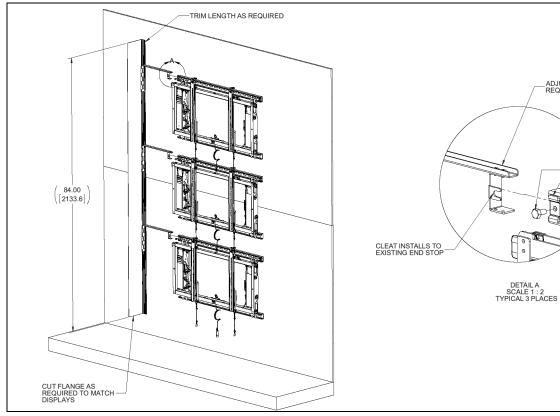


LEGEND

| | Tighten Fastener | Pencil Mark |
|---|-------------------------------|-----------------------|
| C | Apretar elemento de fijación | Marcar con lápiz |
| | Befestigungsteil festziehen | Stiftmarkierung |
| | Apertar fixador | Marcar com lápis |
| | Serrare il fissaggio | Segno a matita |
| | Bevestiging vastdraaien | Potloodmerkteken |
| | Serrez les fixations | Marquage au crayon |
| C | Loosen Fastener | Open-Ended Wrench |
| | Aflojar elemento de fijación | Llave de boca |
| | Befestigungsteil lösen | Gabelschlüssel |
| | Desapertar fixador | Chave de bocas |
| | Allentare il fissaggio | Chiave a punte aperte |
| | Bevestiging losdraaien | Steeksleutel |
| | Desserrez les fixations | Clé à fourche |
| | Phillips Screwdriver | Adjust |
| | Destornillador Phillips | Ajustar |
| | Kreuzschlitzschraubendreher | Einstellen |
| | Chave de fendas Phillips | Ajustar |
| | Cacciavite a stella | Regolare |
| | Kruiskopschroevendraaier | Afstellen |
| | Tournevis à pointe cruciforme | Ajuster |

TOOLS REQUIRED FOR INSTALLATION

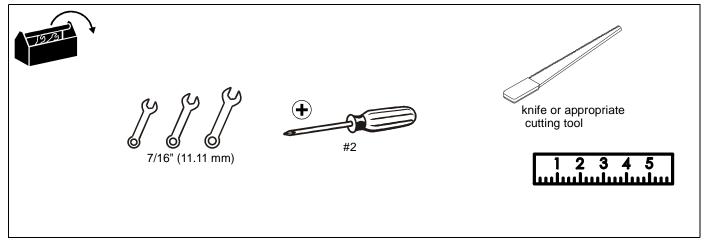



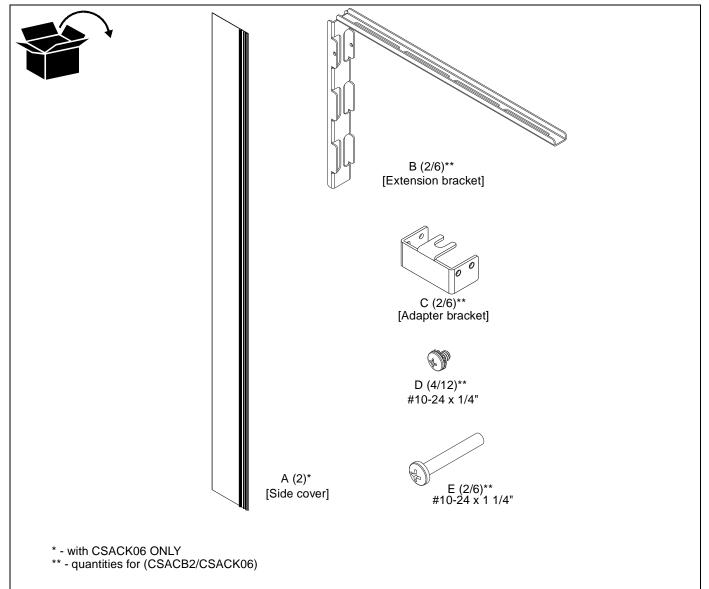

Assembly And Installation

- Use two #10-24 x 1/4" Phillips pan machine screws (D) to secure each adapter bracket (C) to corresponding extension bracket (B). (See Figure 1)
- **NOTE:** Brackets may be installed in either orientation shown in Figure 1 depending on user preference.

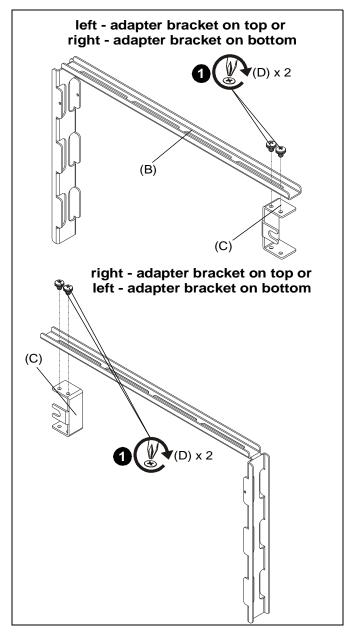


Figure 1

- Carefully use knife or other appropriate tool to cut side cover (A) to desired width to match the profile depth of the monitors. (See Figure 2)
- 3. Slide extension brackets (B) into groove on side cover (A). (See Figure 2)
- **NOTE:** Side cover sold separately from CSAC2 and CSAC4 bracket kits.

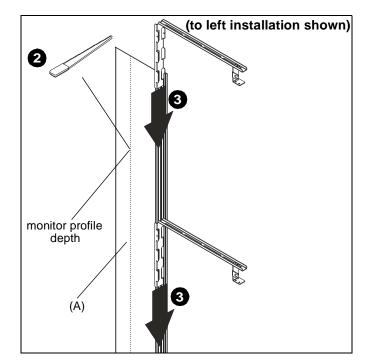


Figure 2

- Loosen stop bolt screws on ConnexSys[™] mounting brackets. (See Figure 3)
- 5. Slide adapter brackets (C) underneath loosened stop bolt screws. (See Figure 3)

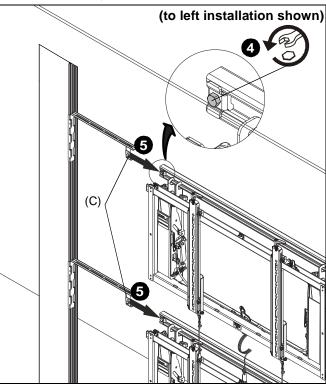


Figure 3

 Tighten stop bolt screws to secure adapter brackets (C) to ConnexSys[™] brackets. (See Figure 4)

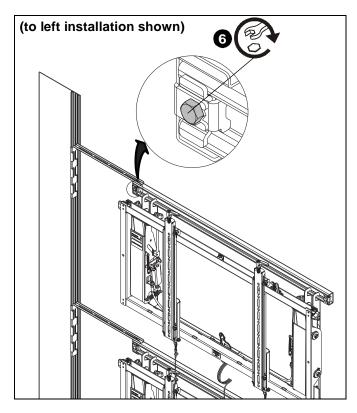


Figure 4

- 7. Use set screws (E) to secure adapter brackets (C) to side covers (A). (See Figure 5)
- 8. Carefully fold side cover by starting at the top and gradually working your way down. (See Figure 5)

CAUTION: Folding side covers (A) carelessly can cause the side covers to crack at the spine. Slowly fold covers in a "zippering" fashion from one end to the other.


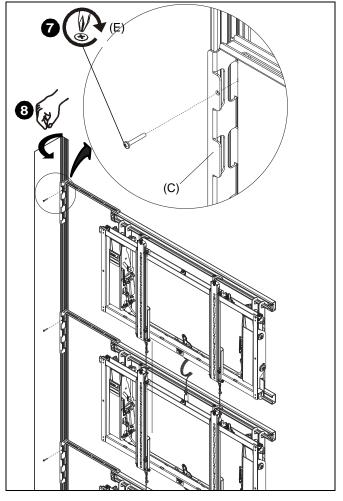


Figure 5

Service Access

To access mount behind side covers for service, press on the outside of the cover profile near the top or bottom of the spine and slowly open the profile from one end in a "zippering" fashion. (See Figure 6)







Chief, a products division of Milestone AV Technologies

8800-002972 Rev01 ©2017 Milestone AV Technologies www.milestone.com 07/17

Europe

Asia Pacific

- USA/International A 6436 City West Parkway, Eden Prairie, MN 55344
 - Ρ 800.582.6480 / 952.225.6000
 - F 877.894.6918 / 952.894.6918
 - Franklinstraat 14, 6003 DK Weert, Netherlands Α
 - +31 (0) 495 580 852 Ρ
 - F +31 (0) 495 580 845
 - Office No. 918 on 9/F, Shatin Galleria Α 18-24 Shan Mei Street Fotan, Shatin, Hong Kong
 - Ρ 852 2145 4099
 - F 852 2145 4477

