

• Safety Notice

Please read these instructions carefully to insure proper use of your device.

1. Please check all warning labels and all markings on this device.
2. Do not expose this device to water or excessive heat.
3. Do not place any foreign objects in the device.
4. Do not attempt to repair the device or open the unit as this will void the warranty.

NOTE: Use AC adapter with USB output 5V/1A for best performance.


• ABOUT THIS PRODUCT

This 4x1 switch routes 4 different sources at a resolution up to 4Kx2K @60Hz UHD to an HDTV display. The unit has 4 HDMI inputs, which makes this unit ideal for simultaneous connection of multiple HDMI devices, such as HDTV, STB, DVD etc. to a single display. In addition, this unit comes with an infrared remote control to select inputs, thus it is easy and flexible to control the input signal as needed.

• Features

1. Switches easily between any 4 HDMI sources
2. Resolution supported up to ultra HD 4Kx2K@60Hz
3. Maximum bandwidth up to 18Gbps
4. Supports HDMI 3D
5. Supports IR control
6. Supports HDR
7. Supports CEC
8. Plug and play, easy to use



• Package Contents

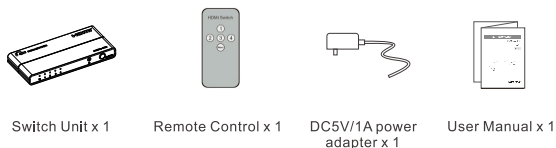

• Installation Requirement

1. HDMI source device (computer graphics card, DVD, gaming console, HD monitoring equipment etc.)
2. HDMI display device (SDTV, HDTV, projector etc.)
3. HDMI cable: HDMI 2.0 standard cable (can support 4Kx2K@60Hz)

• Panel Description

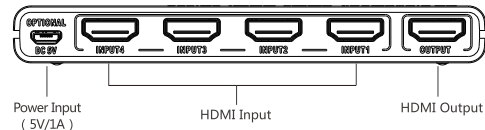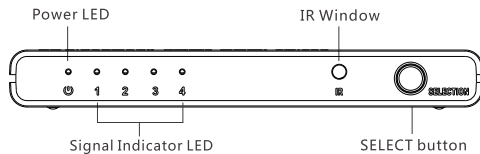


• Remote Controller



"1-4" and "Next" number buttons, to choose any source device as you need. Please remove clear battery seal before using remote.

• Installation and Connection

1. Connection

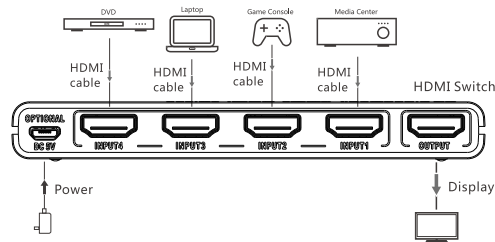

2. Connection instruction

1. Connect source devices and HDMI inputs of the unit with HDMI 2.0 cable.
2. Connect display device and HDMI output of the unit with HDMI 2.0 cable.
3. Plug the power supply into the device to get started.

Note: You can switch the signal source by pressing the SELECT button or use the remote control.

• FAQ

Q: No image output?

- A:** 1) Check the power supply of switch, make sure the power light is on.
2) Check and make sure the HDMI cables connected well.
3) Check and make sure the TV has been set up to the right channel.
4) While connect with PC or notebook via HDMI, please make sure the output mode is mirror or extend.

Q: Display is unstable, splash screen, snow flakes or audio stuck?

- A:** 1) Check and make sure all connections are good and correct.
2) Try to directly connect HDMI source to display, if it is the same, please change the source device.
3) Use high-quality HDMI 1. 4 and HDMI 2. 0 cable for transmitting 4K×2K UHD signal.

• Specification

Items	Specifications
Input ports	4 x HDMI
Output ports	1 x HDMI
Power indicator led	1 x LED
Signal indicator led	4 x LED
HDMI Version	Compatible with HDMI 1.4, HDMI 2.0
HDCP Version	Compatible with HDCP 1.4, HDCP 2.2
I/O TMDS signal	0.7~1.2Vp-p(TMDS)
I/O DDC signal	5Vp-p
Video format supported	Supports 12bit full HD video, 3D video and 4K×2K@30/60Hz ultra HD video
Audio format supported	Support standard audio and DSD (Direct Stream Digital) and HD(HBR) audio
HDMI Resolution	480i/480p/576i/576p/720p/1080i/1080p/4K×2K@24/25/30/60Hz
HDR	Supports HDR
Working temperature	0°C ~ 60°C
Power supply	DC5V/1A
Power consumption	< 2.5W
Dimensions	133.00mm(L)x58.60mm(W)x16mm(H)
Weight	79g
Color	Black

Disclaimer


The product name and brand name may be registered trademark of related manufactures. ™ and ® may be omitted on the user manual. The pictures in this user manual are just for reference. The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. We reserve the rights to make changes without further notice to a product or system described herein to improve reliability, function or design.

4 × 1 HDMI SWITCH

USER MANUAL

4K X 2K
UHD

HDR

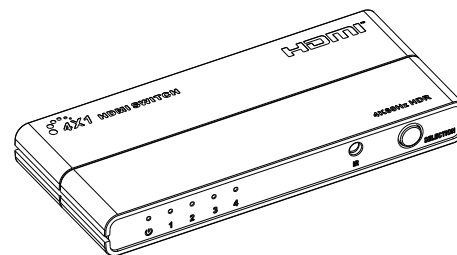

HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE